REV.	DESCRIPTION	DATE
A		02-2013
B		

RoHS Compliant

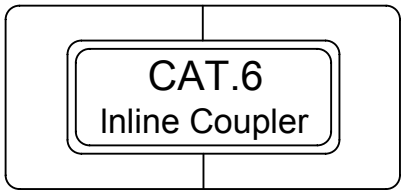

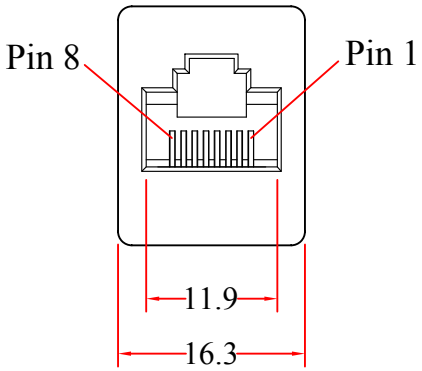

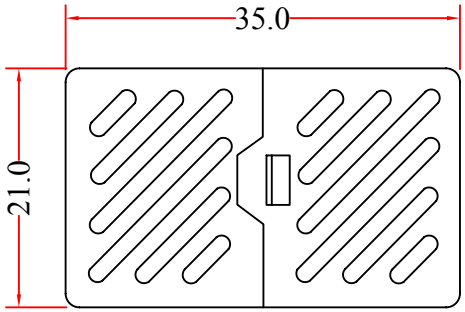

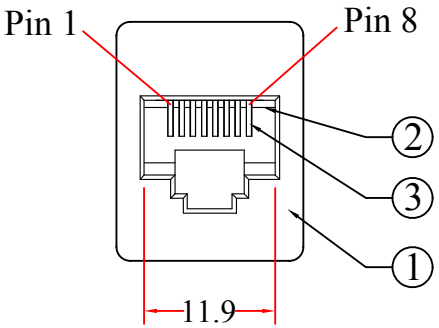

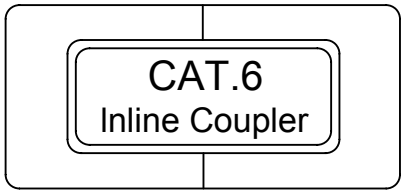

Performance:

1. Insertion Force:900 gms for 8 Contacts.
2. Retention Strength: 7.7 kgs Between Jack and Plug.
3. Operation Temperature: -40°C to 80°C.
4. Durability Jack:750 Cycles Plug - Jack Mating and Unmating Test,Insertion Cycles.
   at 20 Cycles/Minute Max. Contact Resistance Test Per 100 Cycles.
5. The Cat.6 Performance Is In Compliance With The ANS/TIA/EIA 568 B.2-1 Standard.

NO.	SPECIFICATIONS
3	RJ45 Jack, 8P8C 50 Micro Inches,Gold Plated
2	Jack Bracket Set: Polycarbonate,UL 94-HD,Transparent Color
1	UL94V-0 Approval ABS Body

BOM LIST

ITEM NUMBER	30X8-02400WH			DRAWER	JL
TITLE	Cat6 Coupler, White, RJ45 Female, Unshielded			CHECKED	
				APPROVED	
MATERIAL		SCALE			
REV.	A	UNIT	MM		
DRAWING NO:					

888-212-8295 CableWholesale.com